
941 SENSORS AND ACTUATORS

BATHROOM CALL UNIT WITH CANCELLATION

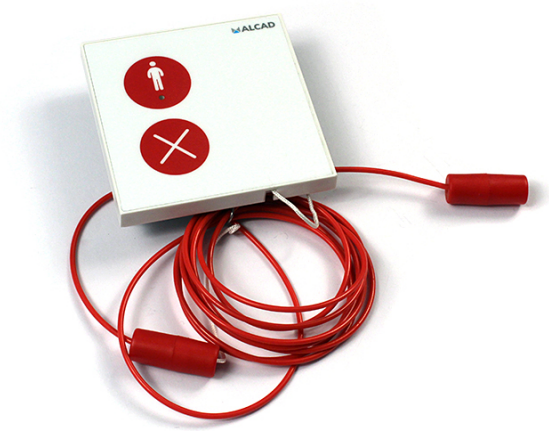

Code : **9410350**


Model : **LLC-821**

Description:
Touch-operated bathroom pull cord equipped with a two-metre cord, two buttons (call and cancel) and a red reassurance LED. Easy to clean thanks to the antibacterial coating on its front panel. An emergency call can be initiated by pulling the cord or pressing the red call button. The red LED indicates the call status, and the call can be cancelled using the corresponding button. It also features an anti-strangulation mechanism that allows the cord to separate into two parts to reduce the risk of accidents. Suitable for flush-mounted or surface-mounted installation.

CODIGO/ CODE/ CODE	9410349, 9410350 9410361, 9415056	9410368, 9410369 9415015
MODELO/ MODEL/ MODÈLE	LLC-82X	LLC-92X
Tirador Pull Cord Tirette	Longitud, Length, Longueur: 2m Color: Rojo, Color: Red, Couleur: Rouge Mecanismo de 6Kg de anti-estrangulamiento; 6kg anti strangle mechanism; Mécanisme de 6kg anti-étranglement	
Pulsador Push button Bouton	Verde, Green, Vert: ,LLC-X24 Rojo, Red, Rouge: LLC-X20, LLC-X21, LLC-X24	
Alimentación Power supply Alimentation électrique	24V	
Consumo (stand by) Energy consumption (stand by) Consommation (stand by)	10 mA	
Consumo (máx.) Energy consumption (max.) Consommation (max.)	40 mA	
Dimensiones Size Dimensions	80x80x10mm	
Peso Weight Poids	O,08Kg	
Material Material Matériel	ABS/Polycarbonate/Polycarbonate	
Color Color Couleur	Blanco, White, Blanc (RAL 9001)	
Temperatura operacional Operating temperature Température de fonctionnement	5°C - 55°C	
Indice de protección Protection Indice de Protection	IP 55	
Instalación Mounting Installation	Empotrado, Embedded, Encastré (ACC-100 / ACC-101) En superficie, On surface, En saillie (ACC-110)	

CODIGO/ CODE/ CODE	9410349, 9410350 9410361, 9415056	9410368, 9410369 9415015
MODELO/ MODEL/ MODÈLE	LLC-82X	LLC-92X
Normativa (seguridad y accesibilidad) Normative (security and accessibility) Norme (sécurité et accessibilité)	EN 60950-1:2006 CTE DB-SUA:2019	
Normativa (emisiones electromagneticas) Normative (electromagnetic emissions) Norme (champs magnétique)	EN 61000-3-3	
Conector de red Net Connector Connexion	Bornas, Contact: 82X	RJ45: LLC-92X

ESQUEMA/SCHEMA/SCHEME

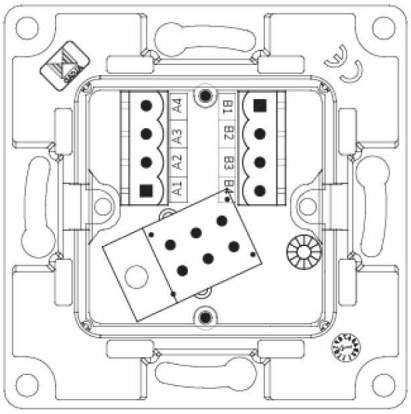

LLC-821

	ES	EN	FR	I/O*
A1	—	—	—	
A2	Tirador de llamada	Call pull cord	Tirette d'appel	Input
A3	—	—	—	
A4	Cancelador de llamada	Cancellation button	Bouton d'annulation	
B1	Luz roja	Red light	Lumière rouge	Output
B2	Pulsador de llamada	Call button	Boutton d'apell	Input
B3	GND	GND	Masse	
B4	Alimentación 24 V	Power supply 24 V	Alimentation 24 V	

* Consultar MANAGER para ver el número de borna correspondiente.
* Check MANAGER to see the corresponding terminal number.
* Consulter MANAGER pour voir le numéro de chaque borne.