



- FILTROS DE RECHAZO PARA MÁSTIL
- MAST REJECTION FILTERS
- FILTRES DE REJET POUR MAT
- FILTROS DE REJEIÇÃO PARA MASTRO
- ABWEHRFILTER FÜR MASTEN



SERIE 902 SERIES

CARACTERISTICAS PRINCIPALES		
MAIN FEATURES		
PRINCIPALES CARACTERISTIQUES		
CARACTERISTICAS PRINCIPAIS		
WESENTLICHE KENNZEICHEN		
CODIGO-CODE-CODE-CODIGO-CODE		9020016
TIPO-TYPE-TYPE-TIPO-TYP		FR-413
NUMERO DE ENTRADAS/SAIDAS NUMBER OF INPUTS/OUTPUTS NOMBRE D'ENTREES/SORTIES NUMERO DE ENTRADAS/SAIDAS ANZAHL DER EINGANGE/AUSGANGE		1/1
NUMERO DE FILTROS NUMBER OF FILTERS NOMBRE DE FILTRES NUMERO DE FILTROS ANZAHL DER FILTER		4
RANGO DE FRECUENCIA FREQUENCY RANGE GAMME DE FREQUENCES RANGO DE FRECUENCIAS FREQUENZBEREICH	Band	UHF
	MHz	470-862
ATENUACION DE INSERCIÓN INSERTION LOSS ATTENUATION D'INSERTION PERDAS DE INSERÇÃO EINSPEISDÄMPFUNG	dB ± TOL	1 ±0,2
FILTROS/CANAL - RECHAZO FILTROS/CANAL - REJEIÇÃO FILTERS/CHANNEL - REJECTION FILTRES/CANAL - REJET FILTER/KANALSPERRE	dB	1 / 14 ± 4,0 2 ⁽¹⁾ / 33 ± 6,0 3 / 44 ±12,0 4 / 52 ±12,0
TEMPERATURA DE FUNCIONAMIENTO OPERATING TEMPERATURE TEMPERATURE DE FONCTIONNEMENT TEMPERATURA DE FUNCIONAMENTO BETRIEBSTEMPERATUR	°C	-10..+65
ÍNDICE DE PROTECCIÓN PROTECTION INDEX INDICE DE PROTECTION ÍNDICE DE PROTECÇÃO SCHUTZKLASSE		IP 53

⁽¹⁾ Sintonzar filtros alternos.



⁽¹⁾ Tune alternate filters.

⁽¹⁾ Régler les filtres alternatifs.


⁽¹⁾ Sintonzar filtros alternos.

⁽¹⁾ Abwechselnde Filter Einstelle.



- COMO AJUSTAR LOS FILTROS
- HOW TO SET UP THE FILTERS
- COMMENT AJUSTER LES FILTRES
- COMO AJUSTAR OS FILTROS
- WIE MAN DIE FILTER EINSTELLT

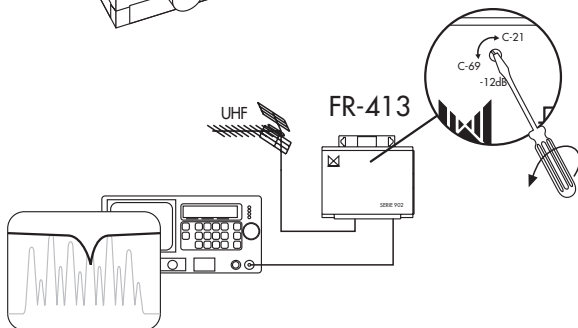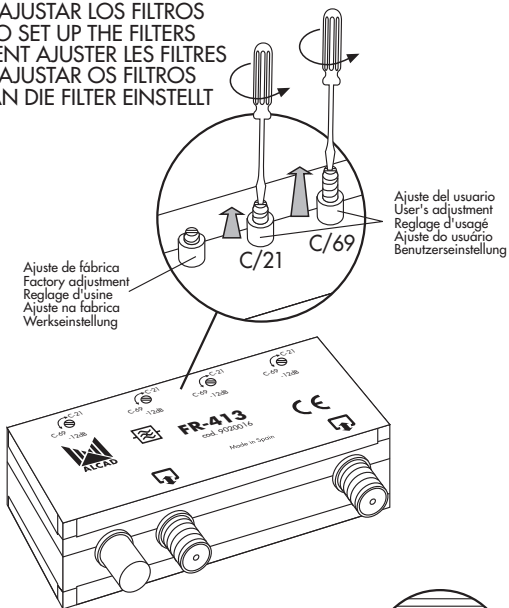


- ESQUEMA TÍPICO
- CONNECTION DIAGRAM
- SCHEMA DE CONNEXION
- ESQUEMA TIPICO
- VERDRAHTUNGSPLAN

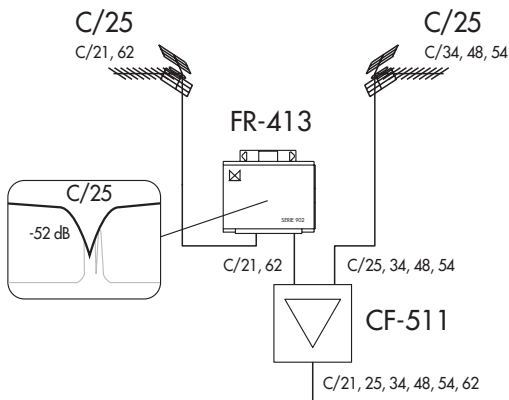

- COMO PREPARAR LOS CONECTORES F
- HOW TO PREPARE THE F CONNECTORS
- COMMENT PREPARER LES CONNECTEURS F
- COMO PREPARAR OS CONECTORES F
- KABEL VORBEREITUNG FÜR F-STECKER



CM-004
9120039





- RESPUESTA EN FRECUENCIA DE LOS FILTROS
- FREQUENCY RESPONSE OF THE FILTERS
- RÉPONSE EN FRÉQUENCE DES FILTRES
- REPOSTA EM FREQUÊNCIA DOS FILTROS
- FREQUENZGANG DER FILTER





C/21

C/69



- 1 FILTRO
- 1 FILTER
- 1 FILTRE
- 1 FILTRO
- 1 FILTER



- 2 FILTROS
- 2 FILTERS
- 2 FILTRES
- 2 FILTROS
- 2 FILTER



- 3 FILTROS
- 3 FILTERS
- 3 FILTRES
- 3 FILTROS
- 3 FILTER



- 4 FILTROS
- 4 FILTERS
- 4 FILTRES
- 4 FILTROS
- 4 FILTER

