
941 SENSORS AND ACTUATORS

WC CALL UNIT WITH CANCELLATION BUS

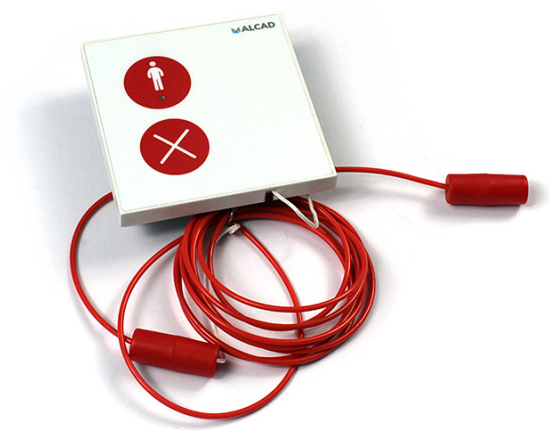

Code : **9410369**


Model : **LLC-921**

Description:
RS-485 (bus) touch-operated bathroom pull cord equipped with a two-metre cord, two buttons (call and cancel) and a red reassurance LED. Easy to clean thanks to the antibacterial coating on its front panel. An emergency call can be initiated by pulling the cord or pressing the red call button. The red LED indicates the call status, and the call can be cancelled using the corresponding button. It also features an anti-strangulation mechanism that facilitates separation of the cord into two parts to reduce the risk of accidents. Suitable for flush-mounted or surface-mounted installation.

CÓDIGO-CODE-CODE	9410369
MODELO-MODEL-MODÈLE	LLC-921
Tirador Pull Cord Tirette	Longitud, Length, Longueur: 2m Rojo, Red, Rouge Mecanismo de 6Kg de anti-estrangulamiento; 6kg anti strangle mechanism; Mécanisme de 6kg anti-étranglement
Pulsador Push button Bouton	Verde, Green, Vert: ,LLC-X24 Rojo, Red, Rouge: LLC-X20, LLC-X21, LLC-X24
Alimentación Power supply Alimentation électrique	24V
Consumo (stand by) Energy consumption (stand by) Consommation (stand by)	10 mA
Consumo (máx.) Energy consumption (max.) Consommation (max.)	40 mA
Dimensiones Size Dimensions	80x80x10mm
Peso Weight Poids	O,08Kg
Material Material Matériel	ABS/Polycarbonate/Polycarbonate
Color Color Couleur	Blanco, White, Blanc (RAL 9001)
Temperatura operacional Operating temperature Température de fonctionnement	-10°C - 55°C
Indice de protección Protection Indice de Protection	IP 55
Instalación Mounting Installation	Empotrado, Embedded, Encastré (ACC-100 / ACC-101) En superficie, On surface, En saillie (ACC-110)

CODIGO/ CODE/ CODE	9410369
MODELO/ MODEL/ MODÈLE	LLC-921
Normativa (seguridad y accesibilidad) Normative (security and accessibility) Norme (sécurité et accessibilité)	EN 60950-1:2006 CTE DB-SUA:2019
Normativa (emisiones electromagneticas) Normative (electromagnetic emissions) Norme (champs magnétique)	EN 61000-3-3
Conector de red Net Connector Connexion	RJ45: LLC-92X

ESQUEMA/SCHEMA/SCHEME

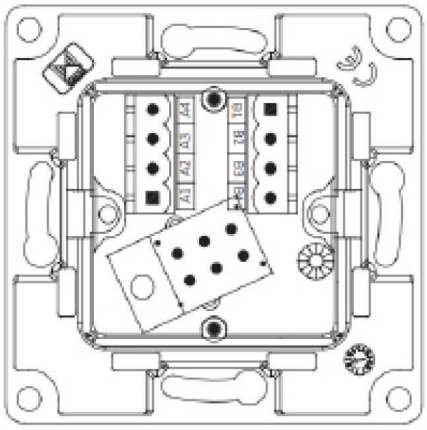

LLC-820

	ES	EN	FR	I/O*
A1	—	—	—	
A2	Tirador de llamada	Call pull cord	Tirette d'appel	Input
A3	—	—	—	
A4	—	—	—	
B1	Luz roja	Red light	Lumière rouge	Output
B2	Pulsador de llamada	Call button	Boutton d'apell	Input
B3	GND	GND	Masse	
B4	Alimentación 24 V	Power supply 24 V	Alimentation 24V	

* Consultar MANAGER para ver el número de borna correspondiente.
* Check MANAGER to see the corresponding terminal number.
* Consulter MANAGER pour voir le numéro chaque borne.