


Offer your customers the
best quality of DTT reception
and the best protection against 5G!

KIT TNT UHD 5G PROTECT



Contents of the pack

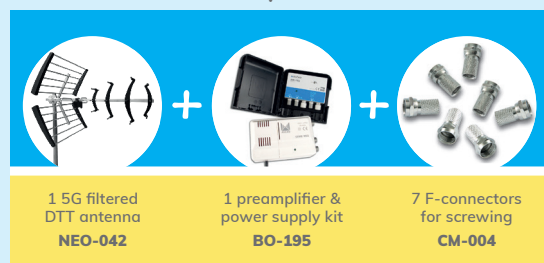

CODE KA-700 | ref. 9000207



The + NEO-042

High GAIN + High Rejection 5G

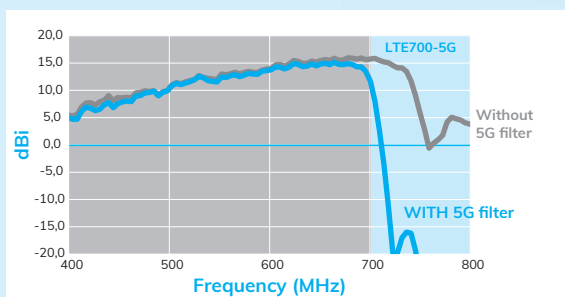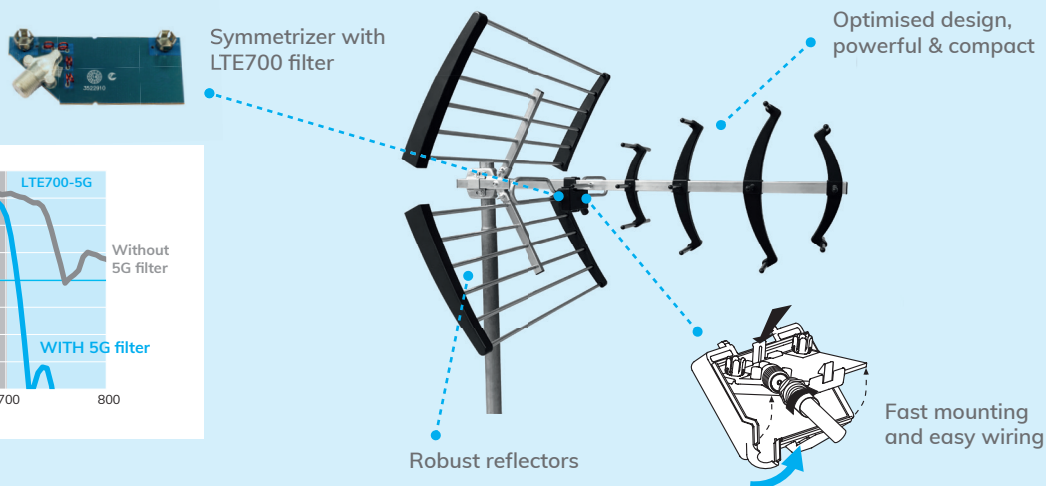


The + BO-195

High GAIN + 5G filtering

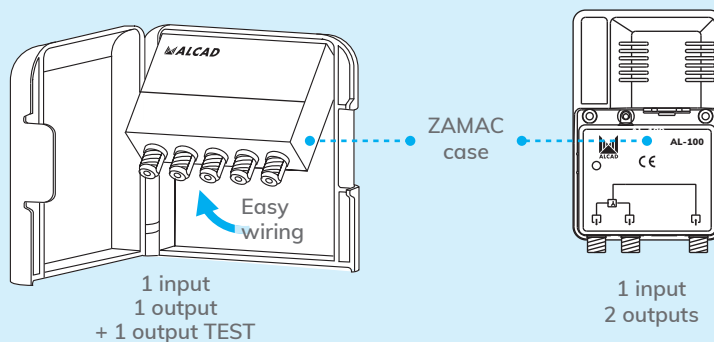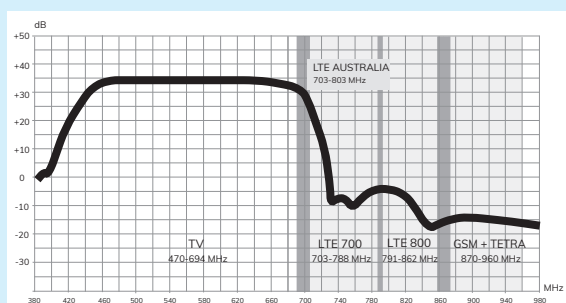


Technical specifications

Gain curve

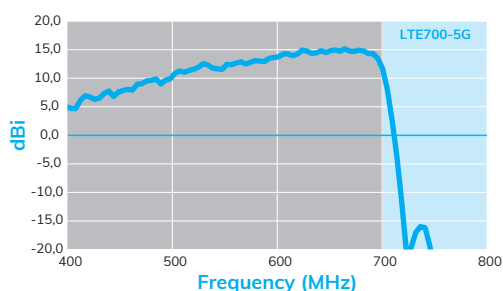

Gain curve

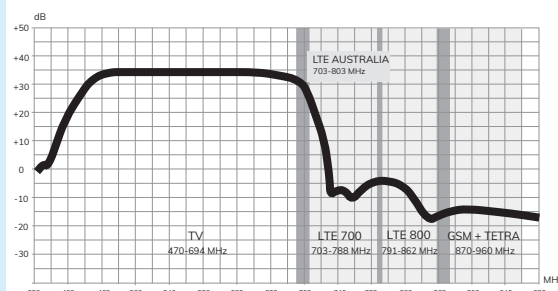

CODE	9000200
MODEL	NEO-042
Frequency range	470-690MHz – channels 21-48
Gain	16 dBi
LTE700 Rejection	40 dB
Front / back ratio	30dB
Dipole	Impedance 75 Ohms – F connector
Polarisation	Horizontal or vertical
Length	800mm
Elevation adjustment	30°

CODE	9030197	
MODEL	BO-195	
Preamplifier		
Number of inputs		1
Frequency range	MHz	470-694
Channels		21-48
Gain	dBi	32
Gain adjustment range	dBi	16
Output level		108 DIN 45004B
Noise figure	mm	3,5 +-1
Protection index		IP 33
Power supply		
Inputs / Outputs		1 /2
Output voltage		+24V – 100mA
Mains voltage	VAC	230 +-10%
Power consumption	W	1,6

