


DOOR ENTRY SYSTEMS

Video and audio intercom | Access control
Home automation

ALCAD
home

MVC-152 model


Enara 7" Wi-Fi monitor

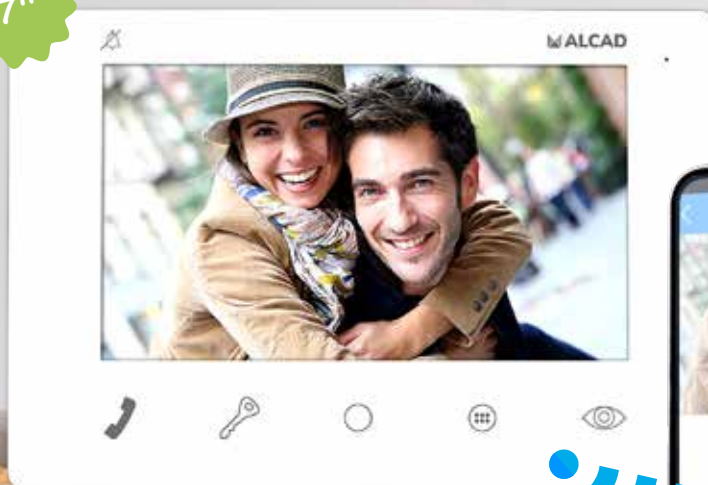

CONNECT WITH YOUR FREEDOM

Enjoy your independence and answer all calls to your video door entry system from your mobile phone, wherever you are.

Integrated
**ACTIVE
VIEW**
TECHNOLOGY

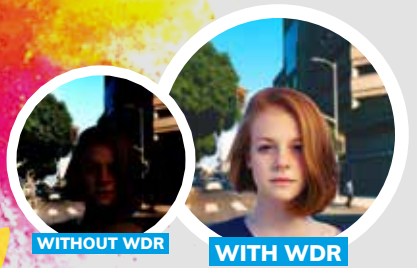

Colours as
you had never
seen before

WDR function: delivers
stunning image quality,
even in extreme conditions

CONNECT WITH YOUR SECURITY

Thanks to the Enara 7" Wi-Fi monitor, **no one will know if you have left:** your home will be safer and you will be able to carry on with your plans.

And **without missing a single detail:** the unanswered call recording function allows you to **record an image or video** of the person who has been to visit you, recording the time and date on which it occurred.

What's more, **with a single glance at your mobile phone** you can:

- See who is calling, **talk and open the door.**
- Receive calls **on up to 4 mobile phones.**
- Watch through your video door entry camera, **even if no one has called.**

'Do not disturb' mode

Are you at home, but don't want to be interrupted? Activate the 'Do Not Disturb' mode on your monitor and turn off the ringing sound.

Receive the call on your mobile phone thanks to the Enara Wi-Fi app

(compatible with iOS and Android operating systems)

Switch camera
(only if you have more than one video door phone connected)

Pick up to talk


Open the door directly if you know your visitor



Android

iOS

Neutral and minimalist design

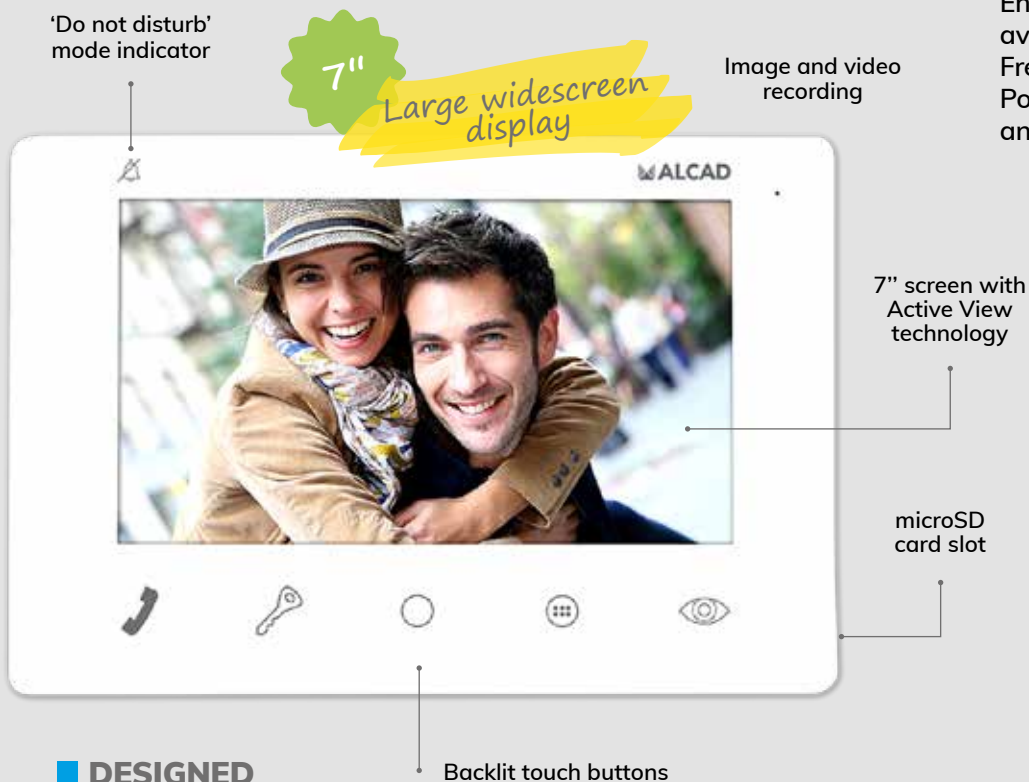

LANGUAGES






Enara 7" Wi-Fi is available in English, French, Spanish, Italian, Portuguese, Turkish and Czech.



DESIGNED TO LAST

Its backlit touch buttons ensure reliable and long-lasting operation because there are no electrical contacts or moving parts, preventing the accumulation of dirt.

Backlit touch buttons

-  Enable / disable communication
-  Door opening
-  Auxiliary button 1
-  Menu button / aux 2
-  Auto switch-on button


Auxiliary functions

Enara 7" Wi-Fi has two auxiliary buttons to add, for example, control of the garage door opener or a second door.







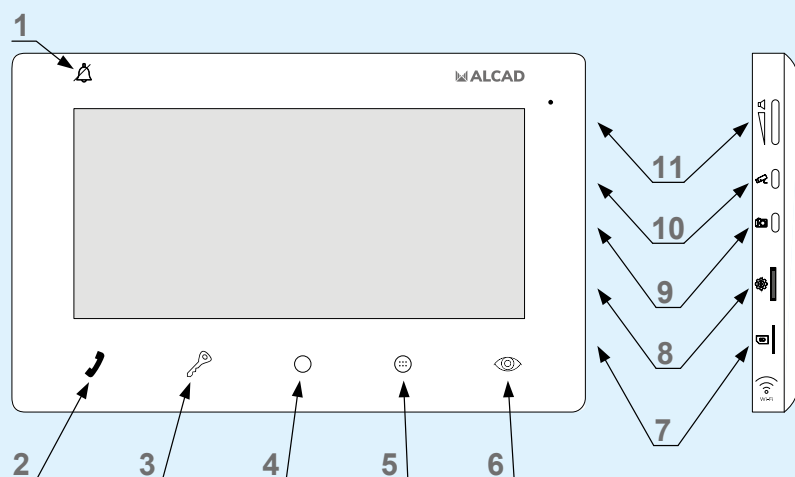






ENARA RANGE WITHOUT WI-FI

No need for Wi-Fi? Whether in its compact 4.3-inch or 7-inch widescreen version, the Enara range of Wi-Fi-free monitors offers all the features that make your day-to-day life easier.



MONITOR DESCRIPTION

Image display screen

-  **1. 'Do not disturb' mode indicator**
With the indicator on, the 'Do not disturb' mode is activated and the call will not ring.
-  **2. Communication button**
Touch button. It allows to establish communication when receiving the call and to cut the communication at the end of it.
-  **3. Door open button**
Touch button.
-  **4. Auxiliary button 1**
Touch button. Allows you to perform additional functions (second door opening, lights on...). Consult your installer.
-  **5. Menu / auxiliary button 2**
Multifunction touch button. If the button is flashing: it indicates you have unanswered calls. With the monitor idle: it allows access to the main menu. With the monitor in communication, it allows additional functions. Consult your installer.
-  **6. Auto-power button**
Touch button.
-  **7. microSD slot.**
-  **8. Roulette-screen setting button.**
Hybrid button: Push button + Slider. Access to menu and roulette to be able to change functions.
-  **9. Photo capture button**
-  **10. Video capture button**
-  **11. Audio volume control**

ENARA 7-INCH Wi-Fi MONITOR	
REFERENCE	9630088 MVC-152
System	2 wires
Screen	TFT Colour 7"
On-screen menu	Yes
Communication	Hands-free
Call volume regulation	"Do not disturb"; 1-9
Buttons for auxiliary functions	2
Captures Photos / Videos	Yes / Yes
microSD slot	Yes
Wi-Fi	Yes
Input Voltage	Through the 2-wires BUS (13 ... 18Vdc)
Consumption (mA)	60 mA (rest); 400 mA (active)
Work temperature	+5... +55 °C
Connections	Plug-in terminals
Integrated load and bypass	Yes, configurable by micro-switches
Installation	Surface mount
Dimensions	212mm x 144mm x 20mm

All the advantages for the installer: easy installation thanks to its plug-in terminals, surface mounting and integrated cascade diverter