

# DOOR ENTRY SYSTEMS

Video and audio intercom | Access control  
Home automation

**ALCAD**  
home

## Enara 7" monitor

MVC-151 model

### Characteristics


- Improved image quality.
- Record of unanswered calls.
- Compatible with the Active View technology of our cameras.
- Languages: English, French, Italian, Portuguese, Turkish, Czech, Spanish, Catalan, Basque.
- Button for auxiliary functions.



*Colours as you had never seen before*

*The widescreen hands-free monitor*

Recording of images and videos

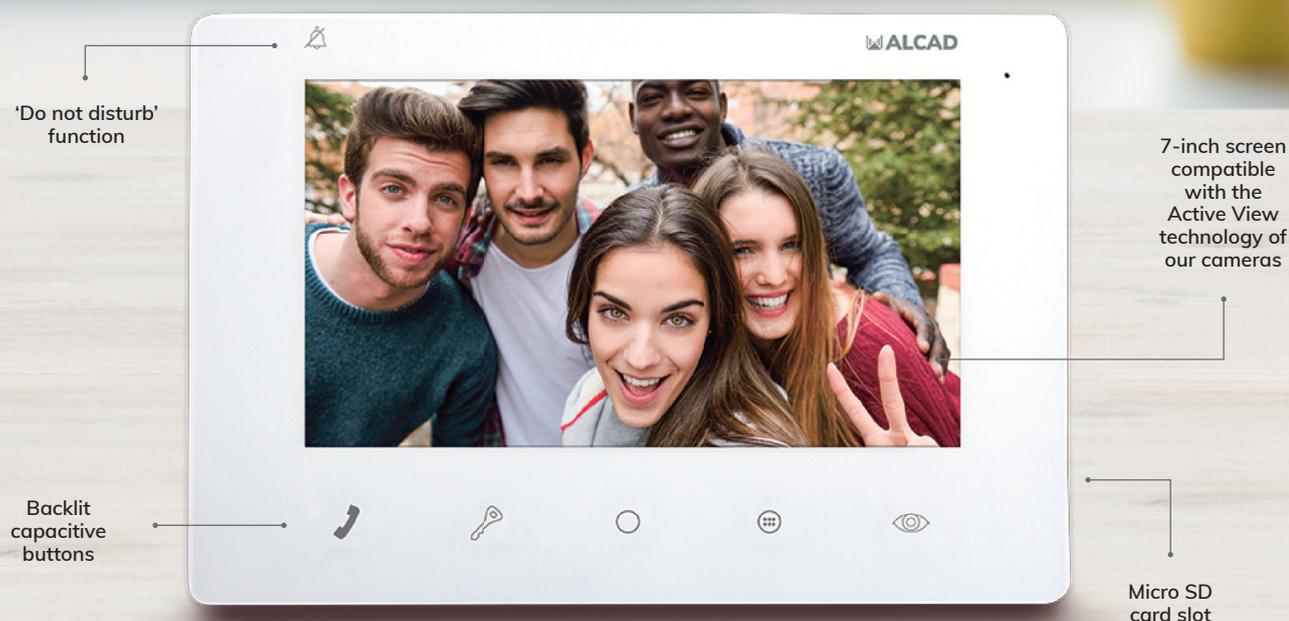

'Do not disturb' function

7-inch screen compatible with the Active View technology of our cameras

Backlit capacitive buttons

Micro SD card slot




Answer

Open

Aux

Aux 2

Look

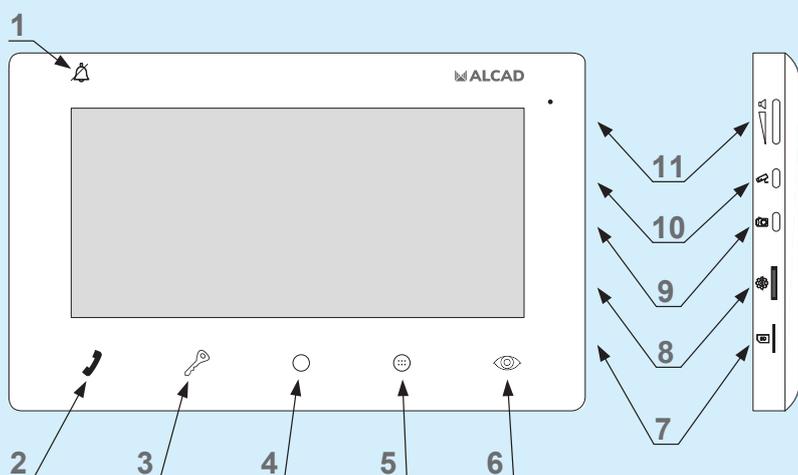

## MONITOR DESCRIPTION

Image display screen

-  **1. 'Do not disturb' mode indicator**  
With the indicator on, the 'Do not disturb' mode is activated and the call will not ring
-  **2. Communication button**  
Touch button. It allows to establish communication when receiving the call and to cut the communication at the end of it
-  **3. Door open button**  
Touch button
-  **4. Auxiliary button 1**  
Touch button. Allows you to perform additional functions (second door opening, lights on...). Consult your installer
-  **5. Menu / auxiliary button 2**  
Multifunction touch button. If the button is flashing: it indicates you have unanswered calls. With the monitor idle: it allows access to the main menu. With the monitor in communication, it allows additional functions. Consult your installer
-  **6. Auto-power button**  
Touch button
- 7. Micro SD slot**
-  **8. Roulette-screen setting button**  
Hybrid button: Push button + Slider. Access to menu and roulette to be able to change functions
- 9. Photo capture button**
- 10. Video capture button**
-  **11. Audio volume control**

ENARA 7-INCH MONITOR	
<b>REFERENCE</b>	<b>9630084 MVC-151</b>
System	2 wires
screen	TFT Colour 7"
On-screen menu	Yes
Communication	Free hands
Call volume regulation	"Do not disturb"; 1-8
Buttons for auxiliary functions	2
CaptureS Photos / Videos	Yes / Yes
Micro SD slot	Yes
WiFi	No
Input Voltage	Through the 2-wires BUS (12,5 ... 18Vdc)
Consumption (mA)	40 mA (rest); 500 mA (active)
Work temperature	+5... +55 °C
Connections	Pluggable terminals
Integrated load and bypass	Yes, configurable by micro-switches
Installation	Surface mount
Proportions	212mm x 144mm x 20mm