


# 900 TERRESTRIAL ANTENNAS

ANTENNA, CHANNELS 21/60 REJ, G = 13 DB

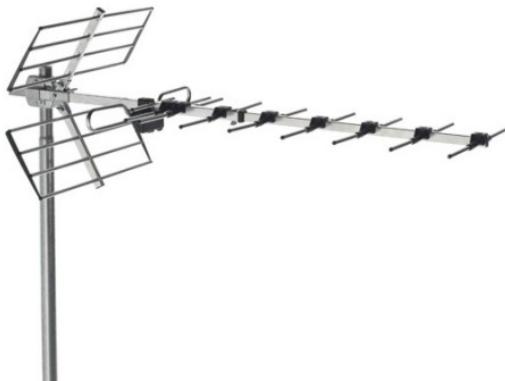

Code : **9000101**

Model : **BU-268**

#### Description

Double array antennas covering the complete gain range. Designed to cover the UHF band up to 790 MHz while rejecting the LTE mobile telephone band. Built-in LTE800 rejection filter. Fast and easy assembly, all the components are premounted and no tools are required for their assembly.

#### Applications

Digital and analogue terrestrial TV installations, collective or individual, where a strong rejection of the LTE800 band is necessary.

#### Characteristics

Rejection of LTE800 and GSM signals as well as signals coming from the bottom of the antenna. Robust antenna with great resistance to both sun and saltwater. Made from aluminium, weather-resistant plastic and galvanised steel. Elevation angle adjustment, mounting in either horizontal or vertical polarity. Includes a balun (symmetrizer), specially designed for the antenna, with F-type connector protected inside the balun box. Packed individually, in multiple packs or unassembled.

CÓDIGO-CODE-CODE		9000101	
MODELO-MODEL-MODÈLE		BU-268	
Rango de frecuencias Frequency range Gamme de fréquences	MHz		470-790
Canales Channels Canaux			21-60
Ganancia Gain Gain	dBi		13
Relación delante/detrás Front/back ratio Rapport avant/arriere	dB		23
Impedancia Impedance Impédance	$\Omega$		75
Pérdidas de retorno Return loss Pertes de retour	dB		$\geq 10$
Polarización Polarity Polarisation			HOR /VER
Ángulo de apertura Beam width Angle d'ouverture	$^{\circ}$ H		26
	$^{\circ}$ V		31
Longitud Length Longueur	mm		1087
Resistencia al viento Wind loading Résistance au vent	N	H	48
		V	70
Índice de protección Protection index Indice de protection			IP 53

Todas las antenas incorporan simetrizador.

All antennas supplied with matching transformer.

Toutes les antennes ont un symétriseur.